



## S. Kirkwood at US 59 and Greenbriar Traffic Movement Upgrades

Project Status: Design

Scope of the Project:

1. Add a right turn lane at US 59 at S Kirkwood westbound to allow for two right turn lane movements at the intersection.
2. Shave median at US 59 at S Kirkwood westbound to allow for a longer stacking left turn lane at the intersection.
3. Replace stop signs at S Kirkwood and Greenbriar with a traffic signal, pedestrian signals and connect existing sidewalks to the traffic signal.
4. Sync existing traffic signals on S Kirkwood to allow for better traffic flow including the intersections of US 59, Bluebonnet and Greenbriar.

Project Partners:

1. City of Stafford
2. Fort Bend County

Estimated Construction Cost approx. \$950,000

Total Design Cost: Stafford paid approx. \$75,000

The City of Stafford to receive \$700,000 reimbursement from Fort Bend County 2013 Bond Program.

# S. Kirkwood at Greenbriar Construction





Traffic Signals



Crosswalks

Replace stop signs at S. Kirkwood and Greenbriar with a traffic signal, pedestrian signals, and connect existing sidewalks to the traffic signal.

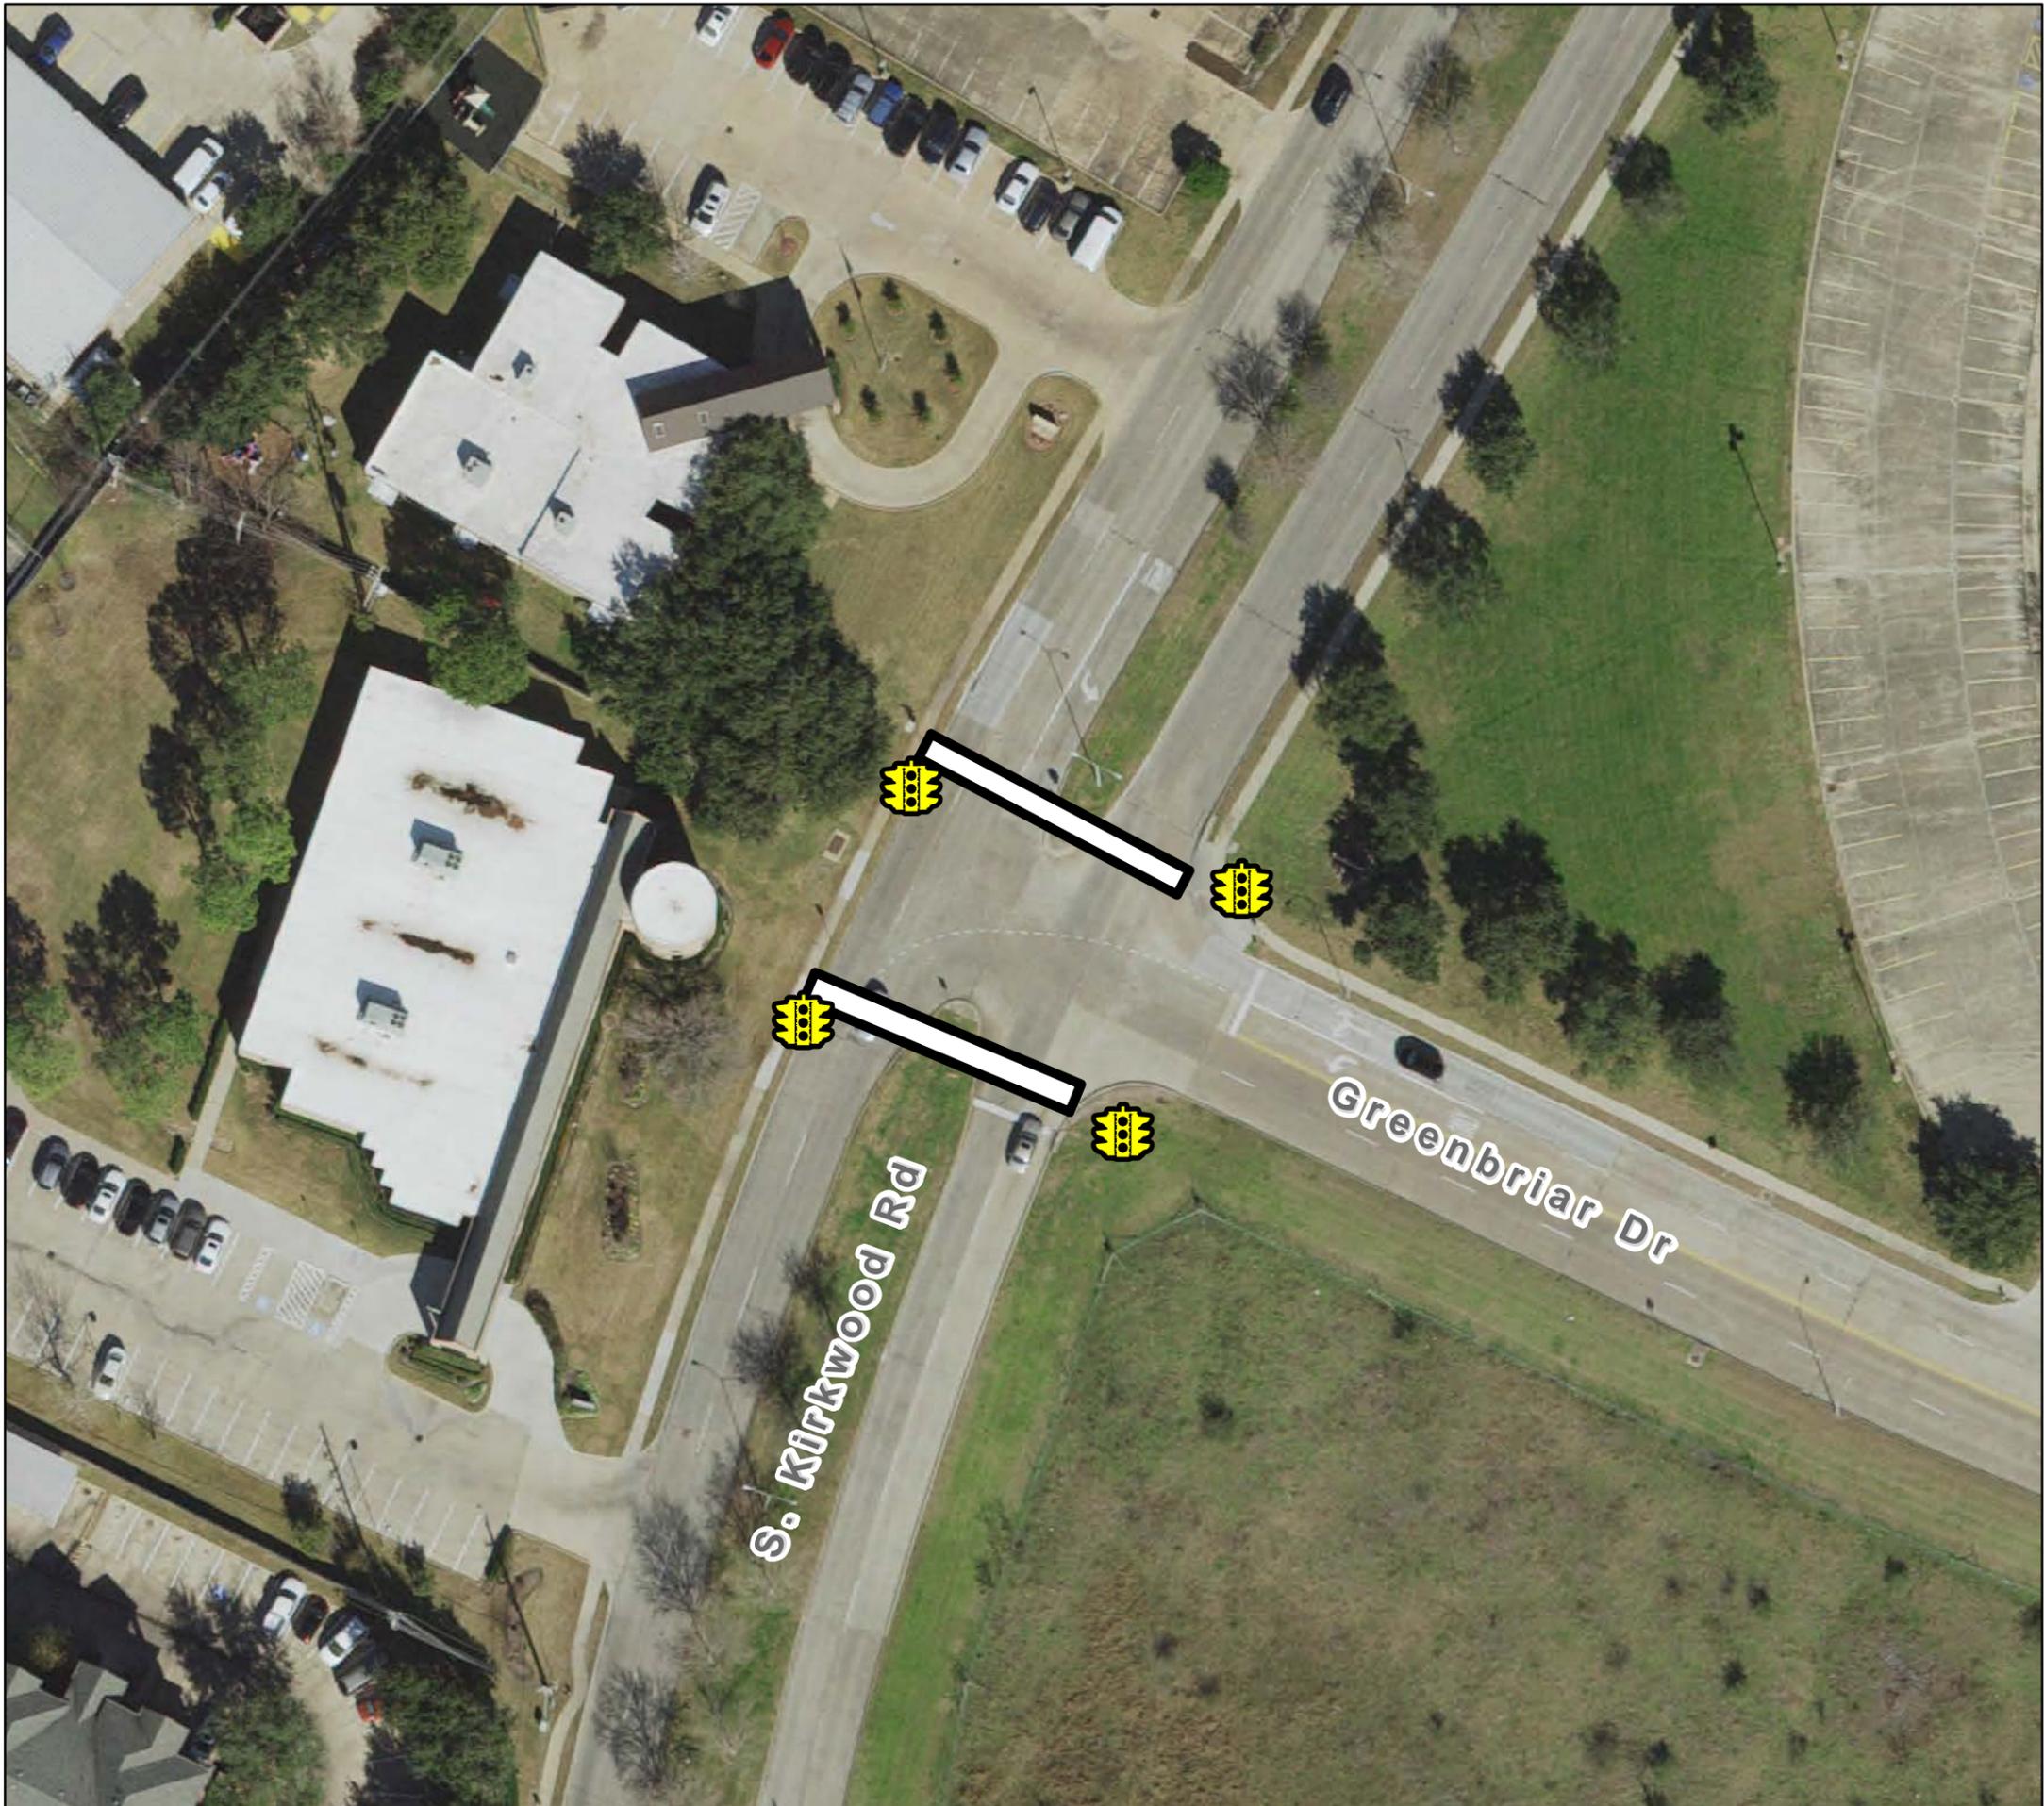

1 inch = 50 feet



Stafford Public Works  
Maps and GIS

# S. Kirkwood at US 59 Construction

 Right Turn Lane & Median Reduction

**Add a right turn lane at US 59 at S Kirkwood westbound to allow for two right turn lane movements at the intersection.**

**Shave median at US 59 at S Kirkwood westbound to allow for a longer stacking left turn lane at the intersection.**

0 25 50 100 Feet

1 inch = 50 feet



Stafford Public Works  
Maps and GIS